


OVERLOAD RELAY 3 ELEMENT

TR MODEL	USED WITH "SC" MODEL	THERMAL OVERLOAD SETTING RANGE (Amp)	UNIT PRICE (BAHT)
TR-0N/3	SC-03	0.1-0.5 / 0.15-0.24 / 0.24-0.36 / 0.36-0.54 / 0.48-0.72 / 0.64-0.96 / 0.8-1.2 / 0.95-1.45 / 1.4-2.2 / 1.7-2.6 / 2.2-3.4 / 2.8-4 / 4-6 / 5-8 / 6-9 / 7-11	850.00
	SC-0 / SC-05	0.1-0.5 / 0.15-0.24 / 0.24-0.36 / 0.36-0.54 / 0.48-0.72 / 0.64-0.96 / 0.8-1.2 / 0.95-1.45 / 1.4-2.2 / 1.7-2.6 / 2.2-3.4 / 2.8-4 / 4-6 / 5-8 / 6-9 / 7-11 / 9-13	
TR-5-1N/3	SC-5-1	0.1-0.5 / 0.15-0.24 / 0.24-0.36 / 0.36-0.54 / 0.48-0.72 / 0.64-0.96 / 0.8-1.2 / 0.95-1.45 / 1.4-2.2 / 1.7-2.6 / 2.2-3.4 / 2.8-4 / 4-6 / 5-8 / 6-9 / 7-11 / 9-13 / 12-18 / 16-22	880.00
TR-N2/3	SC-N1	4-6 / 5-8 / 6-9 / 7-11 / 9-13 / 12-18 / 18-26 / 24-36	1,060.00
	SC-N2	4-6 / 5-8 / 6-9 / 7-11 / 9-13 / 12-18 / 18-26 / 24-36 / 32-42	
TR-N3/3	SC-N2S	7-11 / 9-13 / 12-18 / 18-26 / 24-36 / 28-40 / 34-50 / 45-65	1,350.00
	SC-N3	7-11 / 9-13 / 12-18 / 18-26 / 24-36 / 28-40 / 34-50 / 45-66 / 48-68	
TR-N5/3	SC-N4	18-26 / 24-36 / 28-40 / 34-50 / 45-65 / 53-80	3,250.00
	SC-N5	18-26 / 24-36 / 28-40 / 34-50 / 45-65 / 53-80 / 65-95 / 85-105	
TR-N6/3	SC-N6	45-65 / 53-80 / 65-95 / 85-125	3,350.00
TR-N7/3	SC-N7	45-65 / 53-80 / 65-95 / 85-125 / 110-160	4,700.00
TR-N8/3	SC-N8	65-95 / 85-125 / 110-160 / 125-185	5,050.00
TR-N10/3	SC-N10	85-125 / 110-160 / 125-185 / 160-240	8,580.00
TR-N12/3	SC-N11	110-160 / 125-185 / 160-240 / 200-300	12,100.00
	SC-N12	160-240 / 200-300 / 240-360 / 300-450	
TR-N14/3	SC-N14	240-360 / 300-450 / 400-600	15,000.00

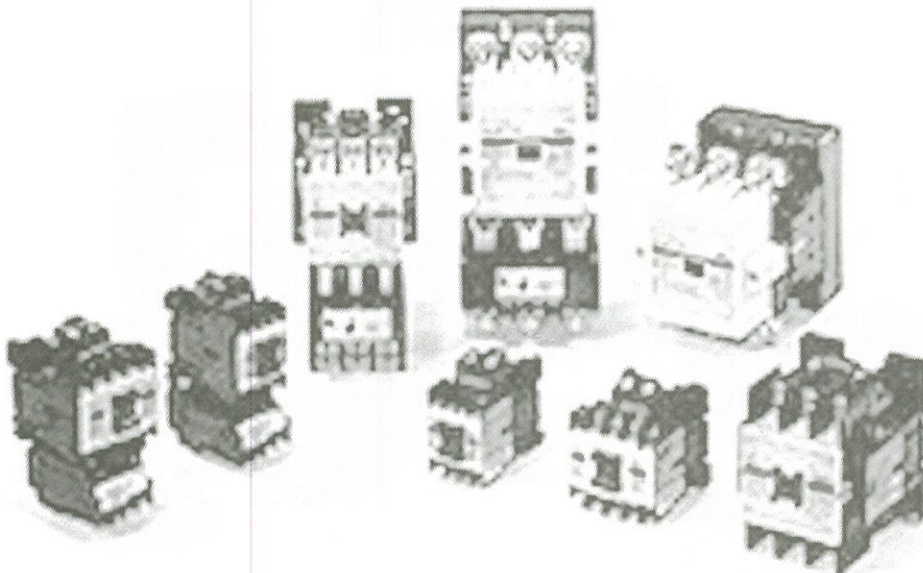

12